




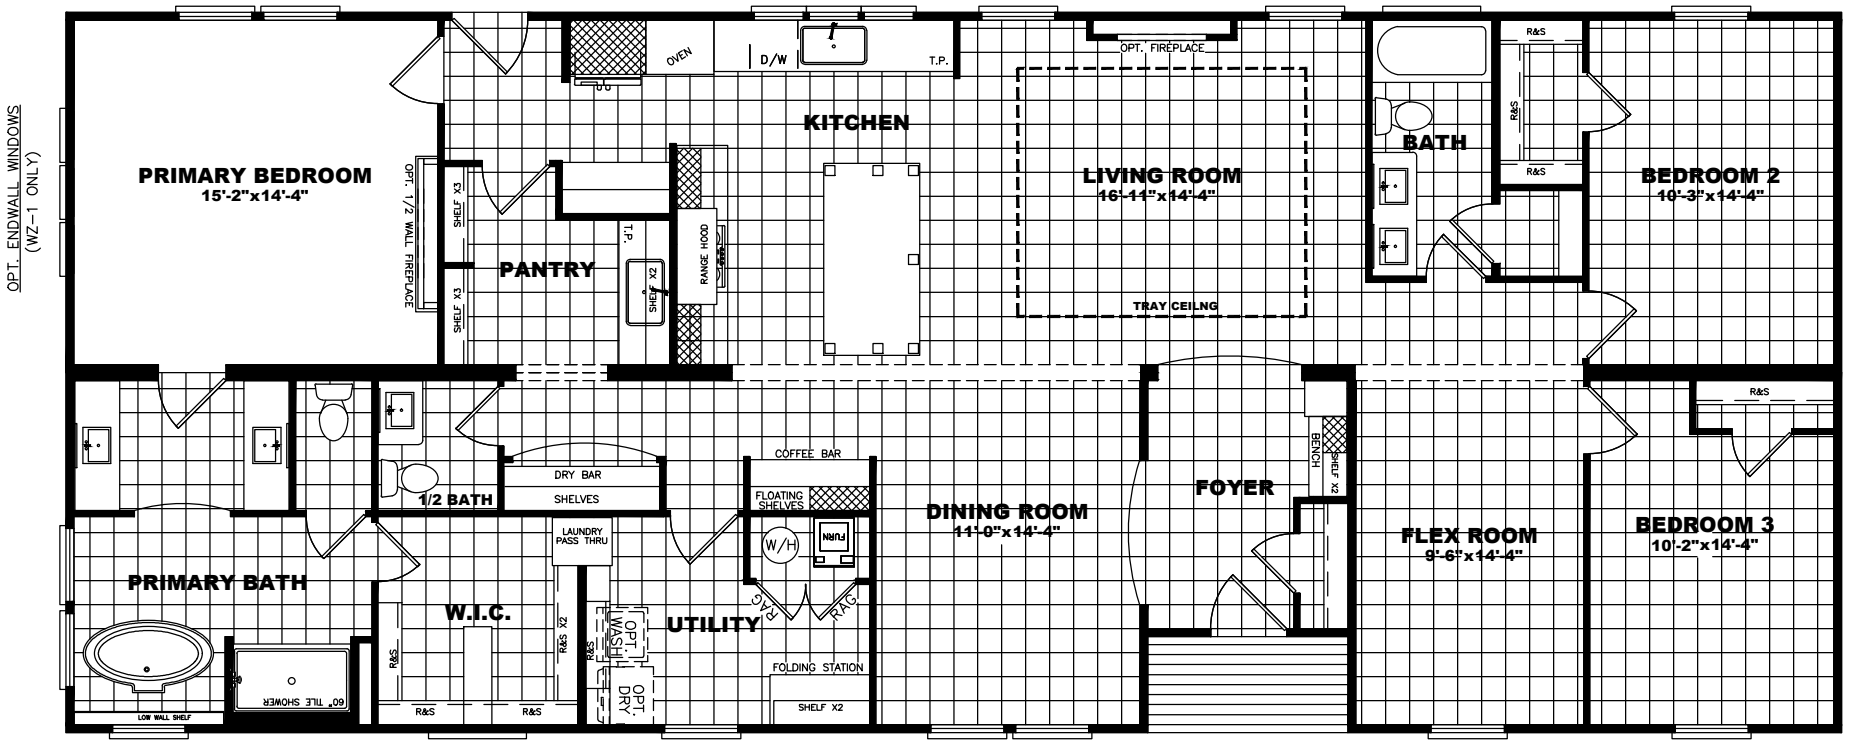

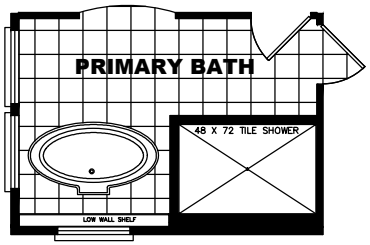

FLORENCE Model #:ENC32743A


Drawing #:
32M538

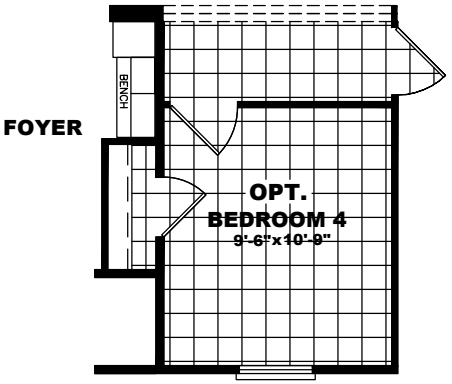


BETTER - STANDARD FRONT ELEVATION

2187 SQ.FT. (STD PLAN "CONDITIONED")
SQ.FT. (W/OPT. PORCH/RECESS "CONDITIONED")

Clayton home building group	Model #:ENC32743A		Drawing #:
	Date:	Scale:	32M538
Product Designer:	32'x74' ENCORE		
ELEVATION			

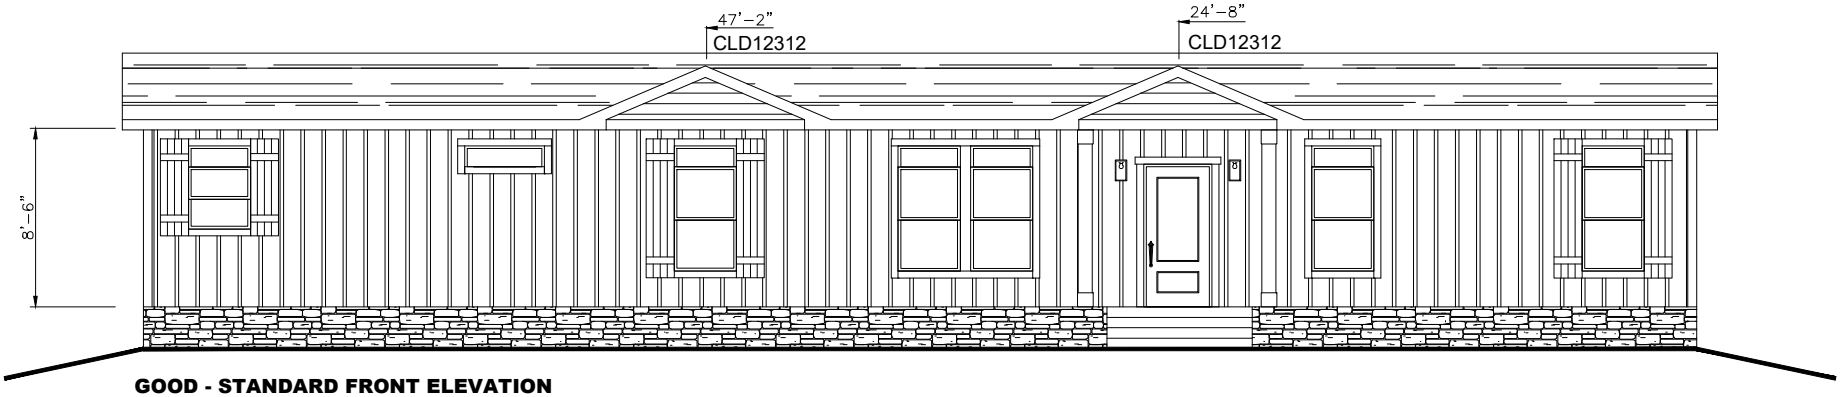

GOOD - STANDARD FRONT ELEVATION

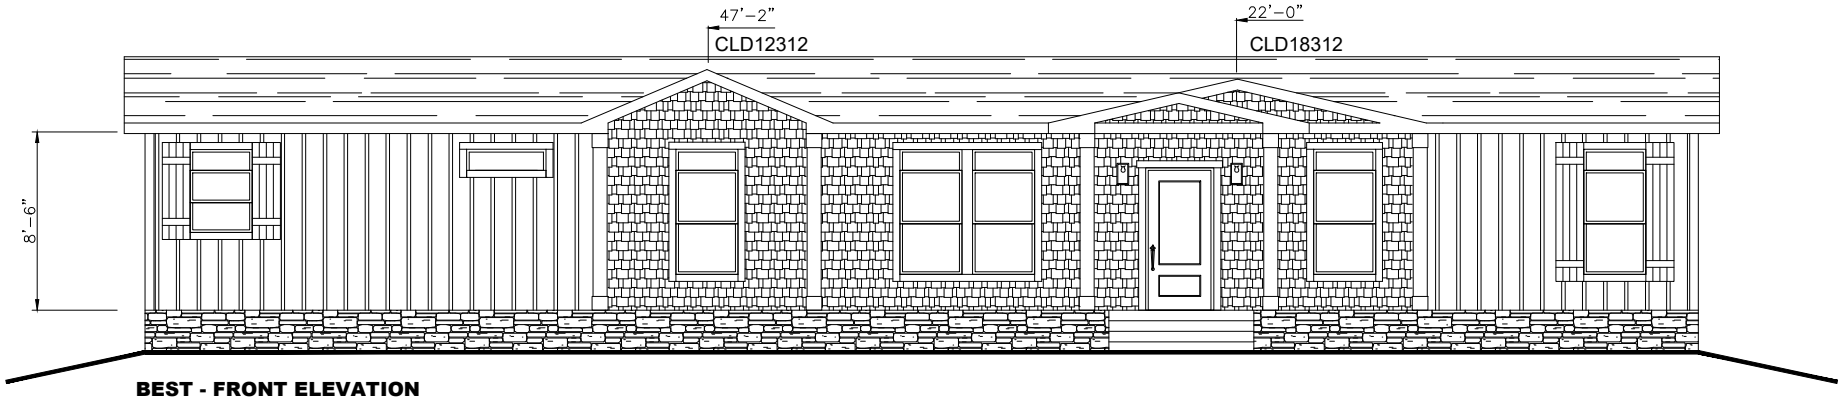

BEST - FRONT ELEVATION


20 lb ROOF LOAD SIDEWALL OPENING PIER LOAD 32' BOX WIDTH	SIDEWALL OPENING (FT) REQUIRED PIER LOAD (LBS)					
	3	4	5	6	8	10
	1244	1413	1581	1750	2088	2425

*FOR 30 lb & 40 lb ROOF LOAD REFER TO TABLES 7b & 7c IN THE INSTALLATION MANUAL.

PIER LOAD 20lb. ROOF LOAD	
COLUMN PIER #	COLUMN LOAD (lbs)
PIER # 1	2556
PIER # 2	2556
PIER # 3	5744
PIER # 4	5744

PIER LOAD 30lb. ROOF LOAD	
COLUMN PIER #	COLUMN LOAD (lbs)
PIER # 1	4475
PIER # 2	4475
PIER # 3	8725
PIER # 4	8725

PIER LOAD 40lb. ROOF LOAD	
COLUMN PIER #	COLUMN LOAD (lbs)
PIER # 1	5494
PIER # 2	5494
PIER # 3	10806
PIER # 4	10806

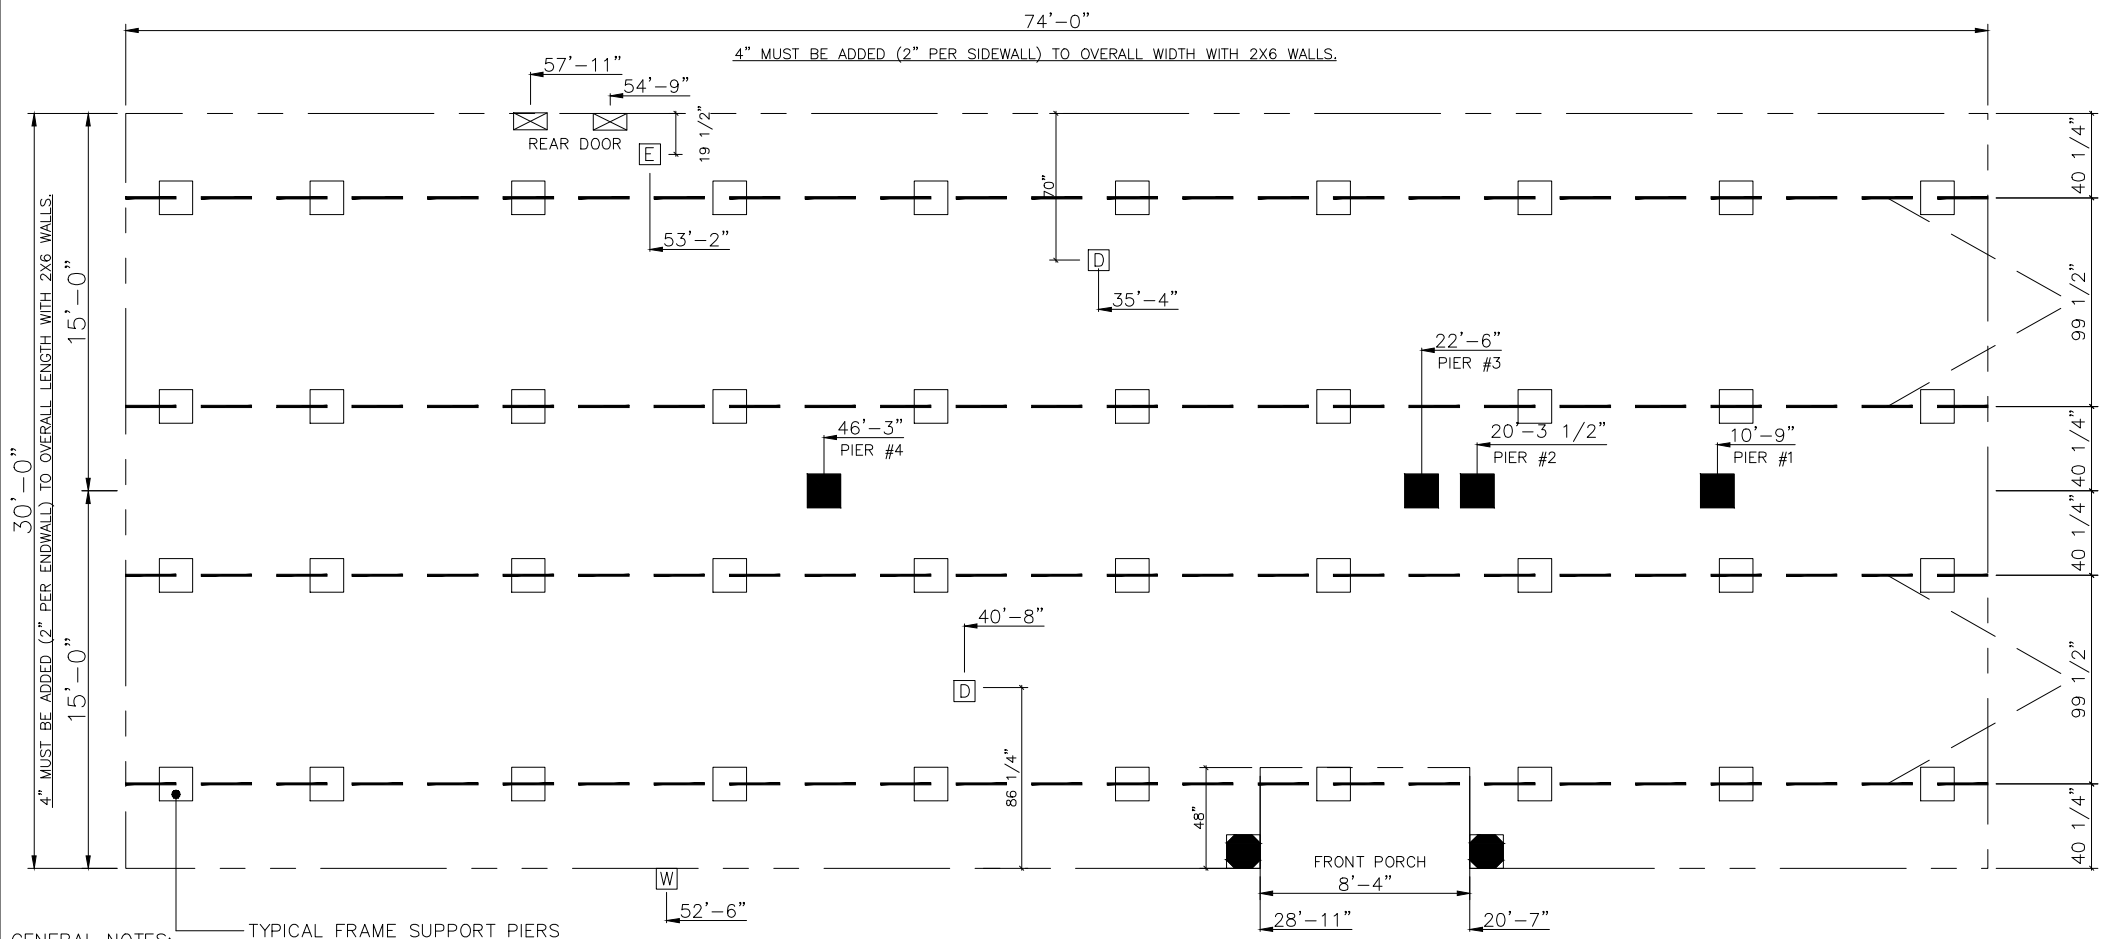

TYPICAL FRAME SUPPORT PIERS

GENERAL NOTES:

1. PIER LOADS SHOWN ARE TO BE USED TO SIZE THE FOOTINGS BELOW THE MARRIAGEWALL FOR COLUMN SUPPORT PIERS. REFER TO TABLES 6b AND 6c IN THE INSTALLATION MANUAL FOR LOAD ON FRAME PIER FOOTINGS FOR HOMES THAT DO NOT REQUIRE PERIMETER BLOCKING. REFER TO TABLES 7b AND 7c IN THE INSTALLATION MANUAL FOR LOAD ON FRAME PIER FOOTINGS THAT REQUIRE PERIMETER BLOCKING. REFER TO TABLES 10 AND 10a TO DETERMINE FOOTING SIZE FOR ALL PIERS.
2. REFER TO TABLE 9 FOR PIER CONFIGURATION AND MAXIMUM ALLOWABLE HEIGHTS. CROSS REFERENCE THE PIER HEIGHT WITH THE MAXIMUM ALLOWABLE FLOOR HEIGHT LISTED IN THE FRAME TIEDOWN CHARTS (TABLE 18, 19, AND 20).
3. FLOOR WIDTH SHOWN IS FOR STANDARD PRODUCT ONLY. CONTACT THE MFG PLANT FOR SPECIFICATIONS OF OPTIONS ORDERED.
4. SERVICE DROP LOCATIONS IDENTIFIED ARE APPROXIMATE.
5. THE MAXIMUM SPACING FOR FRAME SUPPORT PIERS FOR 8" I-BEAMS IS 8 FEET, 10" & 12" I-BEAMS ARE 10 FEET.

SERVICE DROP LEGEND
E = ELECTRICAL DROP
W = WATER INLET
D = DWV PLUMBING DROP
G = GAS INLET

PIER LEGEND
□ = SUPPORT UNDER MATING OPENING
■ = SUPPORT AT MATING COLUMN
▨ = SUPPORT UNDER MATING WALL
● = PIER PORCH/RECESSED ENTRY
□ = PIER MAIN BEAM
⊠ = PIER PERIMETER
● = TIE-DOWN SUPPORT

2187 SQ.FT. (STD PLAN "CONDITIONED")
SQ.FT. (W/OPT. PORCH/RECESS "CONDITIONED")

Clayton home building group

Model #:ENC32743A | Drawing #: 32M538
Date: | Scale:
Product Designer: 32'x74' ENCORE

PIER LOADS